




FICHE TECHNIQUE 8 : POTENCE SUR MURALE FLÈCHE ARTICULÉE

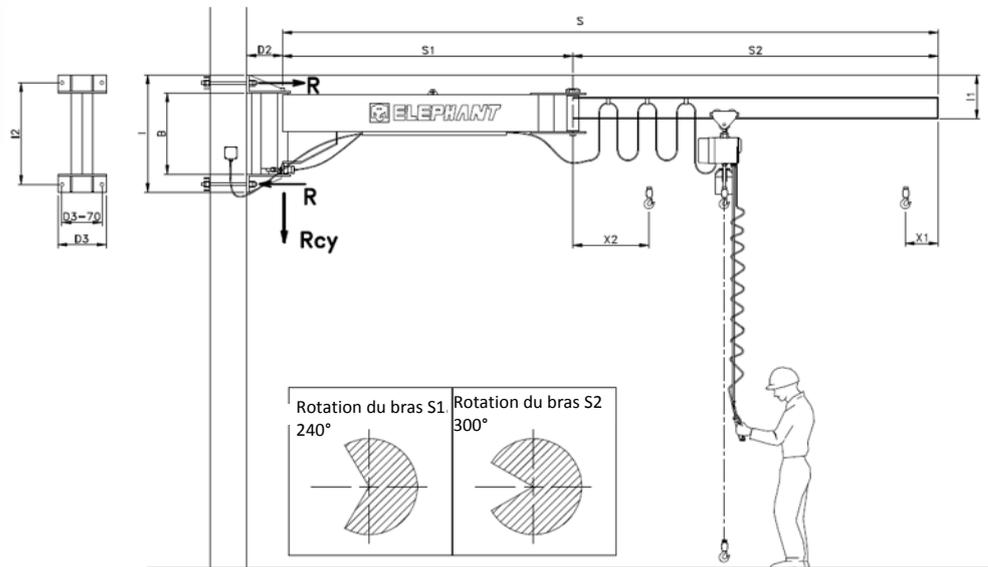

Modello	Portata Kg	S (S1+S2) m	S1 m	S2 m	B mm	I mm	D2 mm	I1 mm	D3 mm	I2 mm	Trave IPE
MS-125/3	125	3	1	2	347	647	255	288	400	507	120
MS-125/4	125	4	2	2	347	647	255	288	400	507	120
MS-125/5	125	5	2	3	347	827	280	328	400	692	160
MS-125/6	125	6	3	3	527	827	280	328	400	692	160
MS-125/7	125	7	3	4	527	977	295	348	400	842	180
MS-125/8	125	8	4	4	-	-	-	-	-	-	-
MS-250/3	250	3	1	2	527	827	280	308	400	692	140
MS-250/4	250	4	2	2	527	827	280	308	400	692	140
MS-250/5	250	5	2	3	677	977	295	348	400	842	180
MS-250/6	250	6	3	3	677	977	295	348	400	842	180
MS-250/7	250	7	3	4	677	977	310	388	400	842	220
MS-250/8	250	8	4	4	-	-	-	-	-	-	-
MS-500/3	500	3	1	2	677	977	295	348	400	842	180
MS-500/4	500	4	2	2	677	977	320	348	400	842	180
MS-500/5	500	5	2	3	677	977	320	388	400	842	220
MS-500/6	500	6	3	3	677	1207	320	388	450	1075	220
MS-500/7	500	7	3	4	907	1207	355	438	450	1075	270
MS-500/8	500	8	4	4	-	-	-	-	-	-	-
MS-1000/3	1000	3	1	2	677	977	355	408	450	842	240
MS-1000/4	1000	4	2	2	677	1207	355	408	450	1075	240
MS-1000/5	1000	5	2	3	907	1207	355	438	450	1075	270

Pour toute autre dimension, nous consulter.

N.B. Cotes indicatives non contractuelles