




FICHE TECHNIQUE 3 : POTENCE FLÈCHE EN PROFIL HE SUR FUT

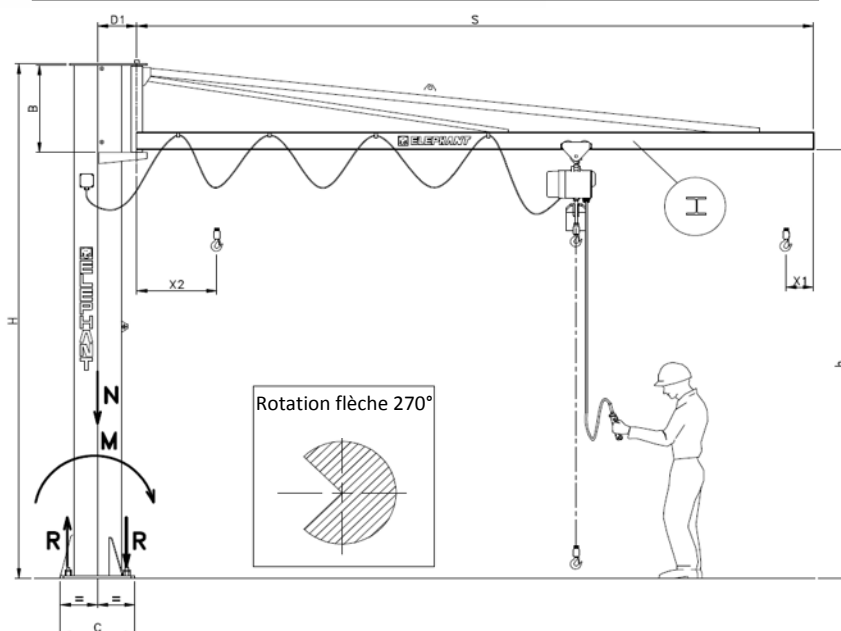

Modèle	CMU Kg	S m	H mm	h mm	D1 mm	B mm	X2 mm	X1 mm	C mm	Profil HE
I-250/3	250	3	3.000	2.480	215	527	580	230	400	100
I-250/4	250	4	3.000	2.480	215	527	580	230	400	100
I-250/5	250	5	3.500	2.830	290	677	730	230	550	120
I-250/6	250	6	3.500	2.830	290	677	730	230	550	140
I-250/7	250	7	3.500	2.830	290	677	880	230	550	140
I-250/8	250	8	4.000	3.100	345	907	880	230	700	140
I-250/9	250	9	4.000	3.100	370	907	880	230	700	140
L-500/3	500	3	3.500	2.830	290	677	685	235	550	120
L-500/4	500	4	3.500	2.830	290	677	685	235	550	120
L-500/5	500	5	3.500	2.830	290	677	685	235	550	140
L-500/6	500	6	4.000	3.100	345	907	785	235	700	140
L-500/7	500	7	4.000	3.100	370	907	835	235	700	140
L-500/8	500	8	4.000	3.100	370	907	835	235	700	160
L-500/9	500	9	4.000	3.100	440	907	835	235	800	180
M-1000/3	1.000	3	3.500	2.830	290	677	700	255	550	140
M-1000/4	1.000	4	4.000	3.100	345	907	800	255	700	140
M-1000/5	1.000	5	4.000	3.100	370	907	850	255	700	160
M-1000/6	1.000	6	4.000	3.100	440	907	950	255	800	160
M-1000/7	1.000	7	4.000	3.100	440	907	950	255	800	160
M-1000/8	1.000	8	4.000	3.100	440	907	950	255	800	180
M-1000/9	1.000	9	4.000	3.100	535	907	950	255	1.000	200
N-2000/3	2.000	3	4.000	3.100	370	907	870	265	700	140
N-2000/4	2.000	4	4.000	3.100	440	907	970	265	800	160
N-2000/5	2.000	5	4.000	3.100	440	907	970	265	800	180
N-2000/6	2.000	6	4.000	3.100	535	907	1.170	265	1.000	200
N-2000/7	2.000	7	4.000	3.100	535	907	1.170	265	1.000	220

Pour toute autre dimension, nous consulter.