


FICHE TECHNIQUE 4 : POTENCE FLÈCHE EN PROFIL HE MURALE

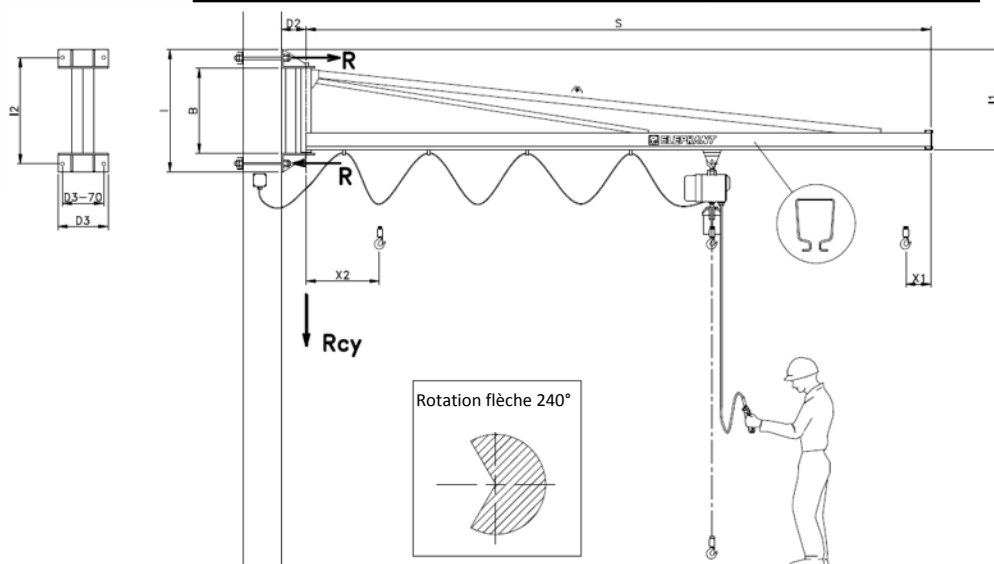

Modèle	CMU Kg	S m	B mm	X2 mm	X1 mm	I mm	D2 mm	I1 mm	D3 mm	I2 mm	Profil HE
O-250/3	250	3	527	580	230	827	205	670	400	692	100
O-250/4	250	4	527	580	230	827	205	670	400	692	100
O-250/5	250	5	677	730	230	977	200	810	400	842	120
O-250/6	250	6	677	730	230	977	200	810	400	842	140
O-250/7	250	7	677	880	230	977	195	810	400	842	140
O-250/8	250	8	907	880	230	1.207	170	1.040	450	1.075	140
O-250/9	250	9	907	880	230	1.207	170	1.040	450	1.075	140
P-500/3	500	3	677	685	235	977	200	810	400	842	120
P-500/4	500	4	677	685	235	977	200	810	400	842	120
P-500/5	500	5	677	685	235	977	195	810	400	842	140
P-500/6	500	6	907	785	235	1.207	170	1.040	450	1.075	140
P-500/7	500	7	907	835	235	1.207	170	1.040	450	1.075	140
P-500/8	500	8	907	835	235	1.207	170	1.040	450	1.075	160
P-500/9	500	9	907	835	235	1.207	170	1.040	450	1.075	180
Q-1000/3	1.000	3	677	700	255	977	195	810	450	845	140
Q-1000/4	1.000	4	907	800	255	1.207	170	1.040	450	1.075	140
Q-1000/5	1.000	5	907	850	255	1.207	170	1.040	450	1.075	160
Q-1000/6	1.000	6	907	950	255	1.207	170	1.040	450	1.075	160
Q-1000/7	1.000	7	907	950	255	1.207	170	1.040	450	1.075	160
Q-1000/8	1.000	8	907	950	255	1.207	170	1.040	450	1.075	180
Q-1000/9	1.000	9	907	950	255	1.207	170	1.040	450	1.075	200
R-2000/3	2.000	3	907	870	265	1.207	170	1.040	450	1.075	140
R-2000/4	2.000	4	907	970	265	1.207	170	1.040	450	1.075	160
R-2000/5	2.000	5	907	970	265	1.207	170	1.040	450	1.075	180
R-2000/6	2.000	6	907	1.170	265	1.207	170	1.040	450	1.075	200
R-2000/7	2.000	7	907	1.170	265	1.207	170	1.040	450	1.075	220

Pour toute autre dimension, nous consulter.

N.B. Cotes indicatives non contractuelles